



Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com



RS-660 16" Radial Arm Saw Machine

RS-640 14" Radial Arm Saw Machine

RS-612 12" Radial Arm Saw Machine

Features:


- Rail is treated, hardened precision ground for maximum wear resistance and slide accuracy.
- Saw head runs on ball bearings giving effortless and smooth movement.
- One piece cast iron arm for durability usage.
- Quick positions stop at 45°, right and left.
- Saw head is firmly set at any angle desired.
- Safety saw blade guard.
- Anti-kickback attachment included.
- Full power industrial motor for durability usage.
- Overload protection switch.
- Heavy sheet metal stand.

| SPECIFICATIONS | RS-660 | RS-640 | RS-612 |
|-----------------------------|--|--|--|
| Motor | 4.5 HP, 3 PH, 230 V | 4.5 HP, 3 PH, 230 V | 2 HP, 1 PH, 110V |
| Motor Speed | 2900 RPM | 2900 RPM | 2900 RPM |
| No. of Head Travel Bearing | 8 | 8 | 4 |
| Spindle Diameter | 1" | 1" | 1" |
| Saw Blade Diameter | 14 ~ 16" | 12 ~ 14" | 10 ~ 12" |
| Max. Trimming Width | 43-1/4" | 33 ³ / ₄ " | 27 ¹ / ₂ " |
| Max. Depth of Cut | 5-1/8" | 4-1/8" | 3-1/8" |
| Max. Cross Cut Length | 35" | 24 ¹ / ₂ " | 16 ¹ / ₂ " |
| Table Size (L x W) | 53" x 49 ¹ / ₄ " | 35" x 43 ¹ / ₄ " | 25 ¹ / ₂ " x 31 ¹ / ₂ " |
| Head Swiveling (Horizontal) | 0° ~ 180° | 0° ~ 180° | 0° ~ 180° |
| Head Tilting (Vertical) | 0° ~ 90° | 0° ~ 90° | 0° ~ 90° |
| Machine Size | 45" x 49" x 63" | 44" x 43 ¹ / ₄ " x 69" | 31 ¹ / ₂ " x 25 ¹ / ₂ " x 43 ¹ / ₄ " |
| N.W. | 550 LBS | 510 LBS | 330 LBS |
| G.W. | 640 LBS | 595 LBS | 380 LBS |

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)



Tilt to Left only

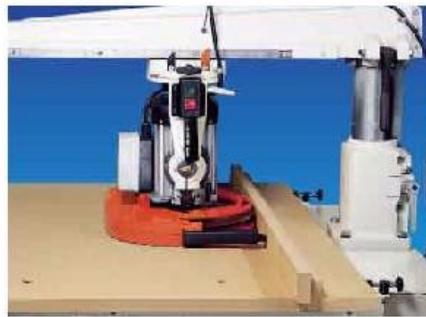

0 to 90 degree



Swing +/- 90 degree



0 degree