



**OMGA®**  
WOOD be nice.



T50 350  
T53 370

---

Precision mitre saws



T50 **350**

Precision mitre saws with rotating table and selfcentering locking for the main angles 90°, 45°, 30°, 22°, 30', 15°, 10° right and left; manual locking for all the other intermediate angles, with reading on the scale. The main characteristics of these mitre saws: structure in cast iron, motor of 2.2 kW with transmission by belt and blade of ø 350 mm. (ø 370 mm. on the model T 53), they ensure an absolute strength and a large cutting capacity.


The model **T53 370** differentiates by the model **T50 350** for the possibility to tilt the head on the vertical axis up to 45°, arriving

therefore to perform compound angle cuts to any possible angle. Both models can be equipped with a wide accessories range.


The version "OP" has been created as a separate model, including the machine in "CE" version with oilpneumatic downstroke, with two hand control for the downstroke of the head, two pneumatic horizontal clamps in cycle with the cutting action, cabinet, side extensions.

## TYPES OF CUT

### T50 **350**

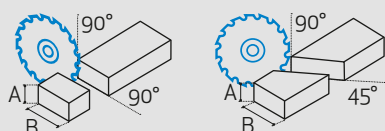

### T53 **370**

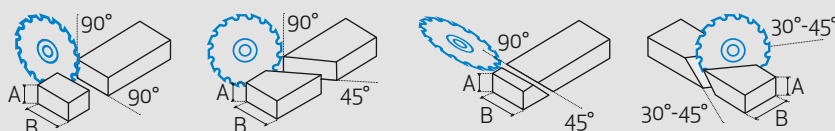



T53 **370**

T50 350  
T53 370:  
**ABSOLUTE  
STRENGTH**



OPTIONAL (T50 350 - T53 370)




Dust collecting cabinet




Double horizontal clamps:  
45° mechanical with foot-pedal  
45° pneumatic with foot-pedal  
90° pneumatic with lever



Quick swivelling with pneum. locking

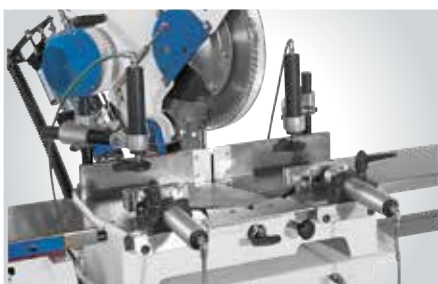

Pneumatic horizontal clamp  
Pneumatic vertical clamp

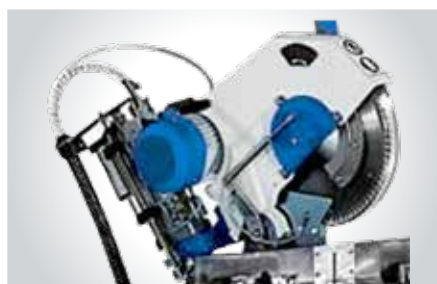

Oil-pneumatic feed of head




Set of scaled tables - Support to join scaled  
tables to cabinet - Nylon flip-over stop - Plexi  
flip-over stop






		T50 350	T53 370
Cross cut capacity	90°	6-3/4"	6-11/16" / 7-1/4"
Cross cut capacity with head at	45°	41.8"	4-3/4" / 57/8"
Max. depth of cut with head at	45°	-	2"
Max. depth	90°	4-5/16"	4-5/16" / 4-3/8"
Motor power	HP	3	4
Saw bore		1"	1"
Saw diameter		14"	14"
Arbor speed	RPM	3400	3400
Dust chute		3-1/8"	3-1/8"
Mitre positive stops		90° - 45° - 30° - 22-1/2° - 15° - 10°	90° - 45° - 30° - 22-1/2° - 15° - 10°
Table size		23-5/8"x17-1/8"x5-3/16"	23-5/8"x17-1/8"x5-3/16"
Crated dimensions		26"x25"x30"	30"x32"x30"
Approx. shipping weight	lbs.	269	330


### SOME EXAMPLES OF COMPOSITION WITH OPTIONAL

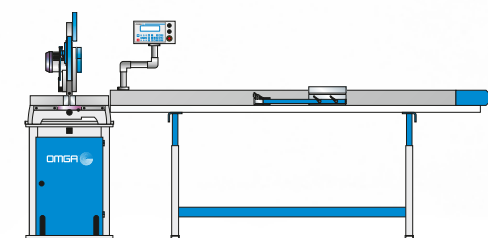

**Omega Stop and Table extension**

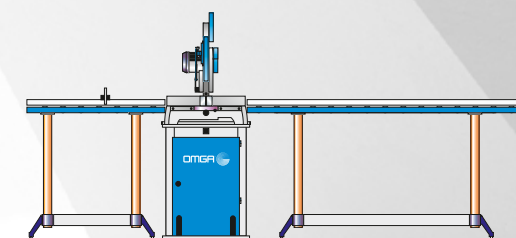

**Roller tables, Infeed/Outfeed**

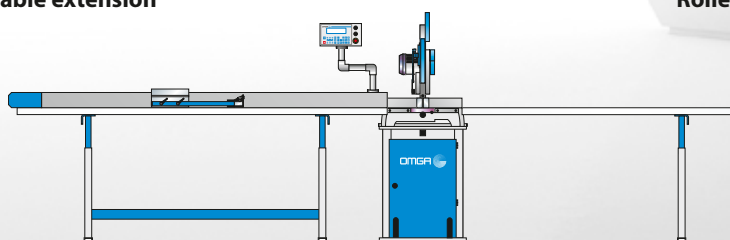

**Omega Stop and Table extension**

#### **OMGA Industries, Inc.**

3705 William Richardson Drive  
 South Bend, IN 46628 USA  
 Tel.: +1 (574) 243-0120  
 Fax: +1 (574) 243-0216  
 Toll Free: 1-800-233-OMGA (6642)  
 info@omgainc.com  
**www.omgainc.com**



#### **Authorized Dealer:**

Global Sales Group, LLC  
 P.O. Box 1835 \* Chico, CA 95927  
 Toll Free: 877-474-5521  
 Office: 530-893-2444  
**www.globalsalesgroupllc.com**

The information and data provided may be subject to modification without prior notice.

2900204546.07 - USA