




Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com



BR-3221U

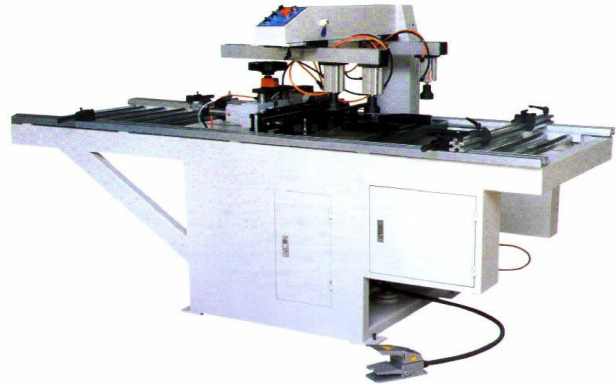


BR-3242U

BR-3221U One Line Boring (21 Bits Universal)

BR-3242U Two Line Boring (21 Bits Universal & 21 Bits Vertical)

Features:

- The machine is standard design and universal for horizontal or vertical boring units.
- The left side 21 drill head can be adjusted to any degree position for vertical or horizontal axis construction drill. (21-3221U One 21 Drill Head, BR-3242U Two 21 Drill Heads)
- The machine is easy to operate. Simply press the foot switch and entire horizontal and vertical boring operations can be accomplished by pneumatic power.
- Vertical boring for drilling at longitudinal and cross directions. The left hand side vertical boring unit can be tilted from vertical to horizontal position by pneumatic piston.
- The vertical boring unit can be adjusted up & down and right & left. Readouts are provided for accurate indication of adjustment.
- An emergency switch is provided on the top beam, allowing the operator to stop the machine conveniently.
- The panel clamp position is adjustable.
- Square slide way for vertical boring unit, providing maximum rigidity and stability for boring operations.

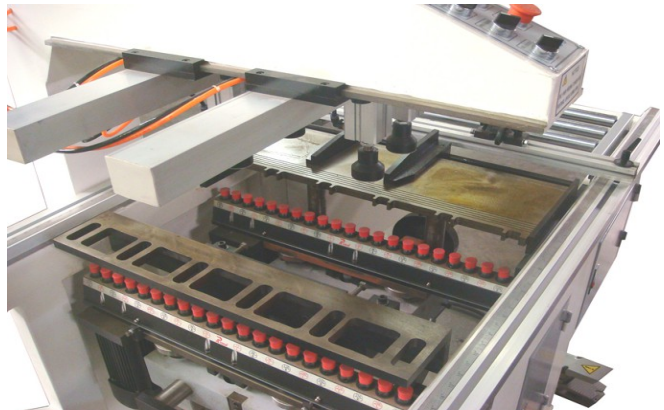


BR-3242U

SPECIFICATIONS	BR-3221U	BR-3242U
Motor (220V 3PH)	2HP	2HP x 2
Drill Speed	3400 RPM	3400 RPM
Drill Bit Type	M 10	M 10
Table Size	36" x 95"	36" x 95"
Vertical Base Travel	2"	2"
Horizontal Base Travel	~	12"
Head Swing (Degree)	0 ~ 90	0 ~ 90
Standard Drill Spindle	21Bits	21 Bits x 2
Drill Between Center	32 MM	32 MM
First To Last Drill	640MM	640 MM
Air Clamp	2	4
Multiple Drill Head Exchange	No	No
Stroke Rate Cycle/Min	0 ~ 10	0 ~ 10
Head Stroke (Drill Depth)	0 ~ 2-1/2"	0 ~ 2-1/2"
N.W.	870 LBS	960 LBS
G.W.	990 LBS	1100 LBS

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)

Left-hand side
 21 bits line boring
 can be tilted from 0 ~ 90 degrees
 (Horizontal to vertical Position)
 Model: BR-3221U & BR-3242U

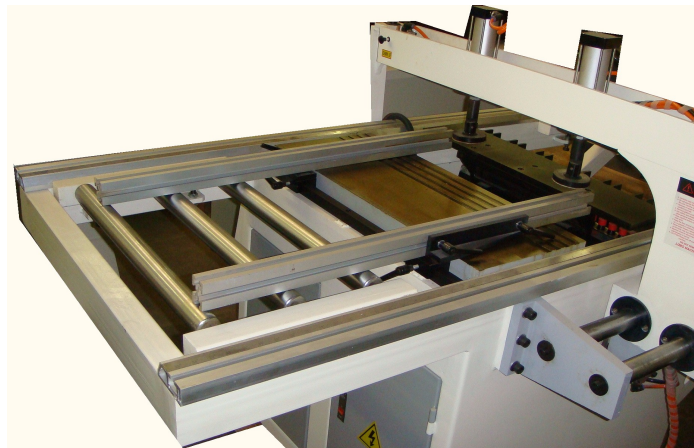

Right-hand side
 Second 21 bits line boring
 only be vertical position
 Model: BR-3242U

