



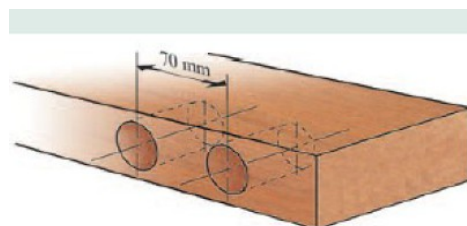

Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

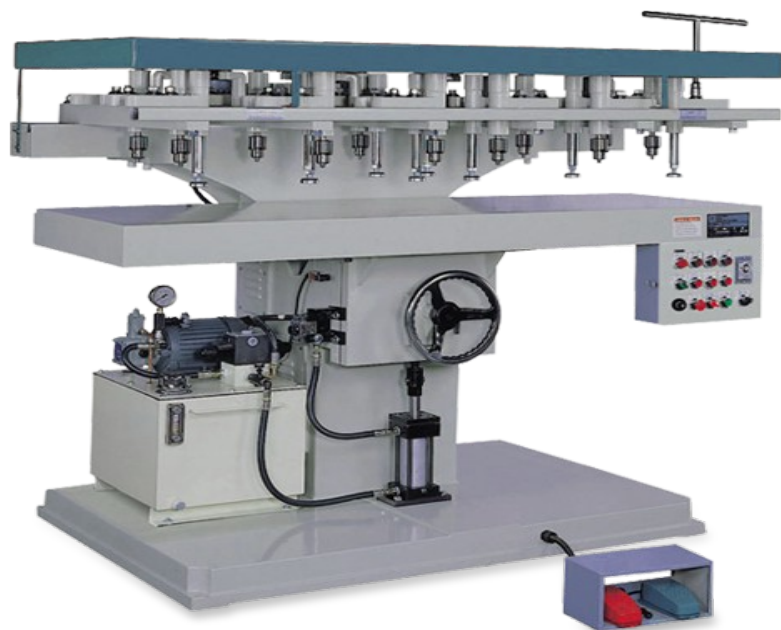

• Minimum distance between spindles

DR-204 2' X 4' Vertical Multiple Boring Machine
DR-306 3' X 6' Vertical Multiple Boring Machine

Optional:

- DR-30SD EXTRA DRILL CHUCK SPINDLE DR-204, 306
- DR-30MDC EXT. GEAR HEAD SPINDLE DR-204, 306

Features:

- Fully cast components. Convenient oil pump for hydraulic power.
- Each spindle can be adjusted forwards/backwards and left/right directions for flexible hole positioning.
- Easy and efficient hydraulic table up and down stroke for drilling operation.
- Spring-loaded hold down and magnetic starter.
- Wide selection of drill spindles. Fine belt tension adjustment.
- Provided powerful and stable drilling motors.
- Cast iron base and table frame for durable usage.
- The machine is ruggedly constructed throughout and convenient operation facilitated by the use of a foot switch control.

Optional Accessories:

- DR-305D Drill Spindle with Chuck, DR-30MDC Multiple Drill Head Spindle, BR-138FB Replacement Belt Lengths 138", BR-157FB Replacement Belt Lengths 157".
- Multiple Drill Head.

SPECIFICATIONS	DR-204	DR-306	DR-3 2UV
Spindle Motor	2 HP x 2	2 HP x 4	2 HP x 4
Table Travel Max.	4"	4"	4"
Max. Table Stroke Rate	30 Times/Min	30 Times/Min	30 Times/Min
Hold Down Clamps	3 PCS	6 PCS	6 PCS
Spindle Speed	4000 RPM	4000 RPM	3400 RPM
Spindle Tilt	~	~	Max. 27 Degree
Min Drill Dis. (Chuck Type)	2"	2"	2" or 1-1/8"
Table Size	24" x 48"	36" x 72"	36" x 48"
Drill Chuck Size	1/2"	1/2"	7/16" x 14UNC
Standard Spindle	8 SETS	16 SETS	12 SETS
Max. Spindle	20 SETS	40 SETS	20 SETS
Hydraulic Pump	2 HP	2 HP	2 HP
N.W.	1980 LBS	2640 LBS	2300 LBS
G.W.	2310 LBS	3300 LBS	2700 LBS

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)



Optional Drill Spindle & Multiple Drill Heads

