




Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

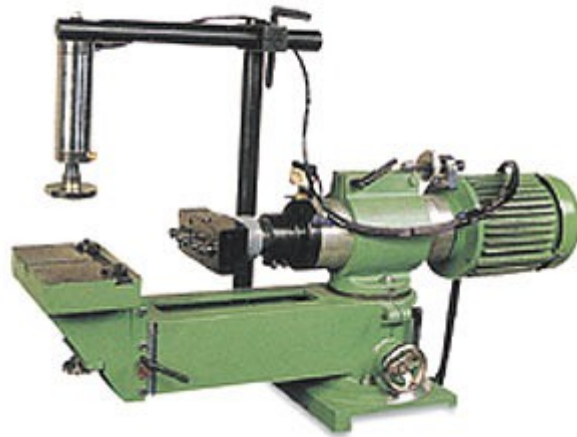

BR-200 Extra Head for BR211, BR233

Features:

- Optional extra drill units need to be ordered with machine.
- Capable of using "multiple drill head".
- Pneumatic clamp and drill head travel.
- Operated by foot pedal, hands free.
- 360-degree swiveling head design allows for side or angular boring.
- Easy adjustment for length and depth of boring.
- Easy to operate by simply stepping on a foot switch air-hydraulic combination system for drill feed movement to afford smooth motions.
- The boring units are quality constructed. They are designed with automatic clamping and boring capacity for high-efficiency operations.
- The boring unit can be swiveled horizontally, as designed, for any boring direction.
- The unit is directly driven with a 3 HP motor for non-power loss transmission.
- The table can be adjusted up and down, and micro adjustment of the spindle allows for accurate position.
- The distance between drills depends on the gear head which is adjustable to meet drilling variations.
- Cast iron base and table for durable usage.

Optional Accessories: Multiple Drill Head.

SPECIFICATIONS	BR-211	BR-233
Motor (3 PH) 220/440V	3 HP x 2	3 HP x 3
Drill Speed (RPM)	3450	3450
Drill Bit Type	7/16" x 14UNC	7/16" x 14UNC
Spindle Stroke (Max)	4"	4"
Table Size (W x L)	6" x 6" x 2	6" x 6" x 3
Max. Working Length	49"	86"
Drill Chuck	No	No
Multi. Drill Head Available	Yes	Yes
Air Clamp	2	3
Standard Spindle	(A5L32) X 2	(A5L32) X 3
Max Spindle	Optional	Optional
Min. Drill Dist. (Chuck Type)	Var.	Var.
N.W.	1320 LBS	1650 LBS
G.W.	1600 LBS	1980 LBS

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)