





Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

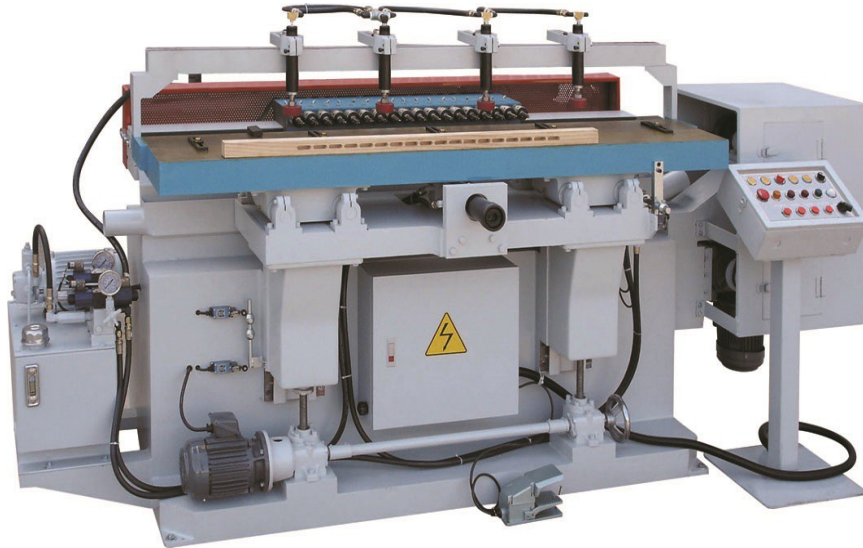

BR-4080B

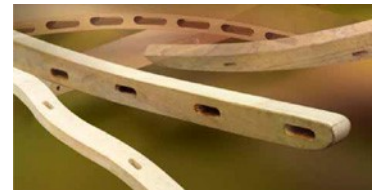


BR-4080B 4' Oscillating Hor. Slot Boring Machine
BR-8080B-8 8' Oscillating Hor. Slot Boring Machine

Optional:

- BR-52SD EXTRA SPINDLE WITH 5/8" CHUCK
- BR-52MDC EXTRA SPINDLE FOR GEAR HEAD

Features:

- Well suited for boring or mortising operations.
- The boring unit can add more spindles easily.
- Table height may be easily adjusted to suit workpiece thickness.
- Each spindle can be adjusted horizontally to position quickly.
- Suitable and affordable for industrial and small workshop use. .
- Pneumatic clamp and drill head travel, operated by foot pedal, hands free.
- Pneumatic and hydraulic in and out stroke control for max. drilling power.
- Oscillating operation can be drilled by separate motor, fast and easy adjust.
- The foot switch permits operator to free his hands for handling workpiece. Mortising operation is conveniently made by simply treading on the foot switch, that upgrades working efficiency and safety.
- Cast iron base and table for durable usage.

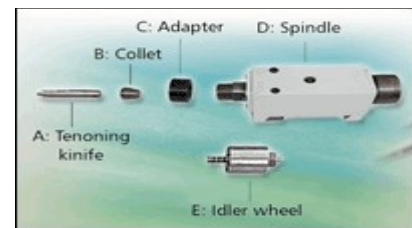


SPECIFICATIONS	BR-4048B	BR-8096B
Mortise Width	0 ~ 2-1/2"	0 ~ 2-1/2"
Max. Mortise (Drill) Depth	2-3/8"	2-3/8"
Mini. Distance between Holes	2-3/4"	2-3/4"
Spindle Motor (220/440V 3 PH)	5 HP x 2	7-1/2 HP x 2
Oscillating Rate	50 ~ 90 Stroke/Min	50 ~ 90 Stroke/Min
Drill Speed (RPM)	4,500 / 10,000	4,500 / 10000
Drill Chuck	1/2"	1/2"
Table Size (W x L)	13" x 49"	13" x 96"
Max. Working Length	2" ~ 48"	2" ~ 96"
Standard Hold Down Clamp	3 pcs	5 pcs
Standard Drill Spindle with Machine	8 pcs	16 pcs
Max. Drill Spindle	16 pcs	24 pcs
Oscillation Drive Motor	1 HP	1 HP
Hydraulic Pump Motor	2 HP	2 HP
Net Weight	3960 LBS	5160 LBS
Machine Size (L x W x H)	98" x 36" x 63"	122" x 36" x 70"


(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)




BR-8080B

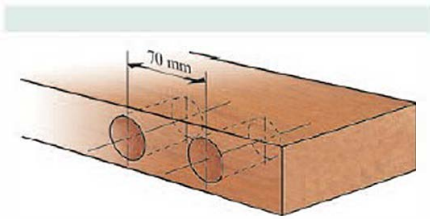


• Minimum distance between spindles

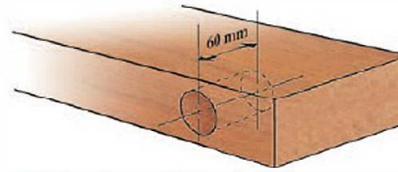


• Maximum hole depth

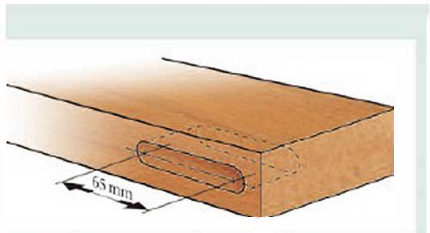


• Maximum mortise width

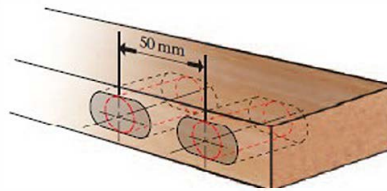


• Minimum distance between spindles

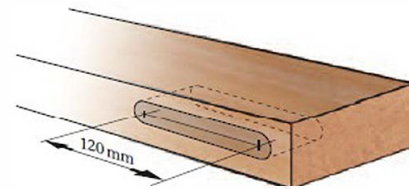

• Maximum mortise width

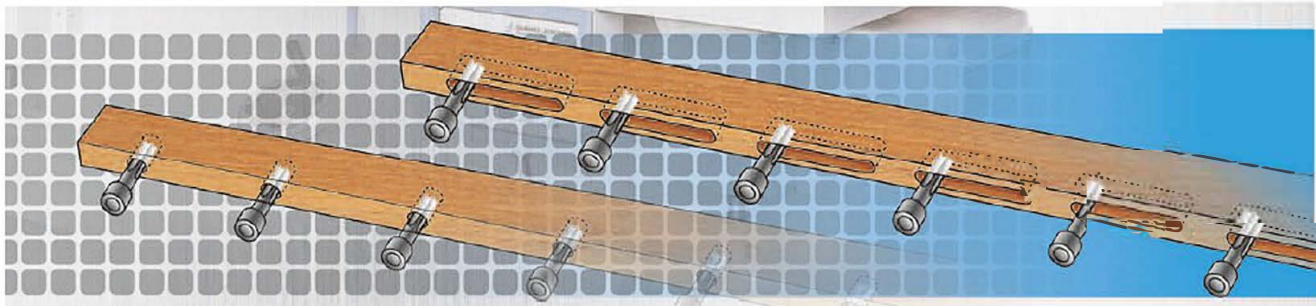

Optional Accessories :

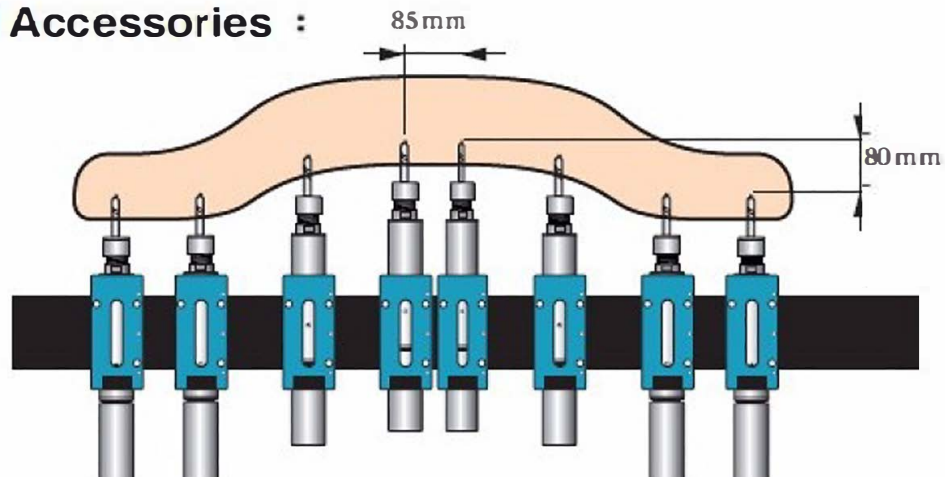

- Spindle extension 80mm
- Spindle speed 10,000rpm
- Minimum distance between spindles 85mm