



<mark>)yna</mark>ric, Inc.

High Speed Automatic Strapping Machine

For all of your General Packaging Needs



Performance

Authorized Dealer: Global Sales Group, LLC P.O. Box 1835 Chico, CA 95927 Toll Free: 877-474-5521 Office: 530-893-2444 Fax: 530-893-2244 www.globalsalesgroupllc.com

Reliability

► User Friendly

Dynaric, Inc. AM659



15.4" (400mm)

Making The AM659 is a high speed automatic heat seal strapping machine that is Your designed for ease of operation by equip-Strapping ment operators. It is capable of applying **Job Easier**


up to 50 straps/minute to a wide range of sizes and types of packages.

The AM659 can operate using 9mm and 12mm wide plastic strap. Because of its ability to use many sizes of strap the AM659 enables customers to choose the best Dynaric plastic strap for their budget and packaging requirements. The AM659 has many standard features that include automatic coil feed system, strap loop ejector, short feed detector, refeed system and precision electronic tension control. These user friendly features combine to increase strapping performance and reliability, as well as providing ease of operation for the equipment operator.

At A Glance

- Servo motors for precise performance and elimination of belts, clutches and pulleys.
- Wide range electronic tension control
- Adjustable strap heat seal dwell time for optimum seal joint efficiency
- Applies 50 straps/minute
- Automatic coil feed system for ease of start up
- End of strap sensor and strap loop ejector
- Strap re-feed system in case of a short feed
- Standard foot bar pedal activator and start cycle ٠ push button
- Standard arch sizes available 650mm wide x 400mm high and 650mm x 600mm high

Personalize Your Packages

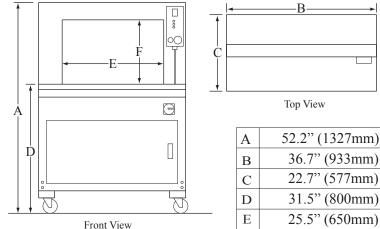

Arch Sizes Available

	Width								
		650	850	1050	1250	1450	1650	2650	
Height	400	•	•	•	•	•	•	•	
	600	•	•	•	•	•	•		
	800	•	•	•	•	•	•		
	1000	•	•	•	•	•	•		
	1200	٠	•	٠	٠	•			

F

Dots in Bold are common arch sizes.

• Sizes not shown can be custom built in 200mm increments.

Specifications

Cycle Time:	50 straps per minute			
Tension Range:	2.2-121 lbs.			
Strap Width: St	tandard: 9mm or 12mm			
Sealing Method:	Heating Element			
Reel Inside Diameter:	200, 230, 280 mm (specified)			
Power Supply:	110/220/230/240V,50/60Hz,1PH			
Power Consumption:	0.5 kw			
Standard Arch Size:	W 650 x H 400 mm			
Table Height:	800mm			
Layout Dimension:	L 933 x W 577 x H 1327 mm			
Machine Weight:	573 lbs.			

ality Plastic Strap and Printed Stra					
aric, Inc. Quality Plastic					
Made in the USA					
Dynaric, Inc.					
Wed Strap Made in the US					

Personalize your plastic strapping. Dynaric's high quality printed plastic strapping can be custom printed with your company logo, name, information or message. Printed strapping is an economical way to identify special products, display company logo and information or for product security and more.



