

N3400RA



GLOBAL SALES GROUP, LLC

The Retractable Arch Strapping Machine

- Economical owing to highest availability
- Robust and extremely low maintenance
- Powerful
- Variable strap width
- Pneumatic free

Authorized Dealer:
Global Sales Group, LLC

P.O. Box 1835

Chico, CA 95927

Toll Free (USA & Canada): 877-474-5521

Office: 530-893-2444

www.GlobalSalesGroupLLC.com



- ASLF 'Anti-Strap-Loss-Function' Constant strap control
- Automatic Strap feed
- Strap width 5 - 12 mm, either
- Strap end detection system with automatic discharge of remaining strap
- Coil outside
- Operation Terminal with Soft-Button
- DAT 'Direct-Access-Technology'
- Torque controlled strap tension, adjustable
- GreenTech energy concept, low power consumption
- Machine movable
- SAN - Small and Narrow
- Table height steplessly adjustable
- Removable front table top, without tools
- Wear-free, energy saving direct-drive-moto
- Low maintenance and low wear strap arch

Certified Minority Owned Company

Phone: (800) 526-0827 | Fax: (757) 363-8016 | E-mail: order@dynaric.com | Web: www.dynaric.com


Dynaric, Inc.



40 YEARS

N3400RA

The Retractable Arch Strapping Machine

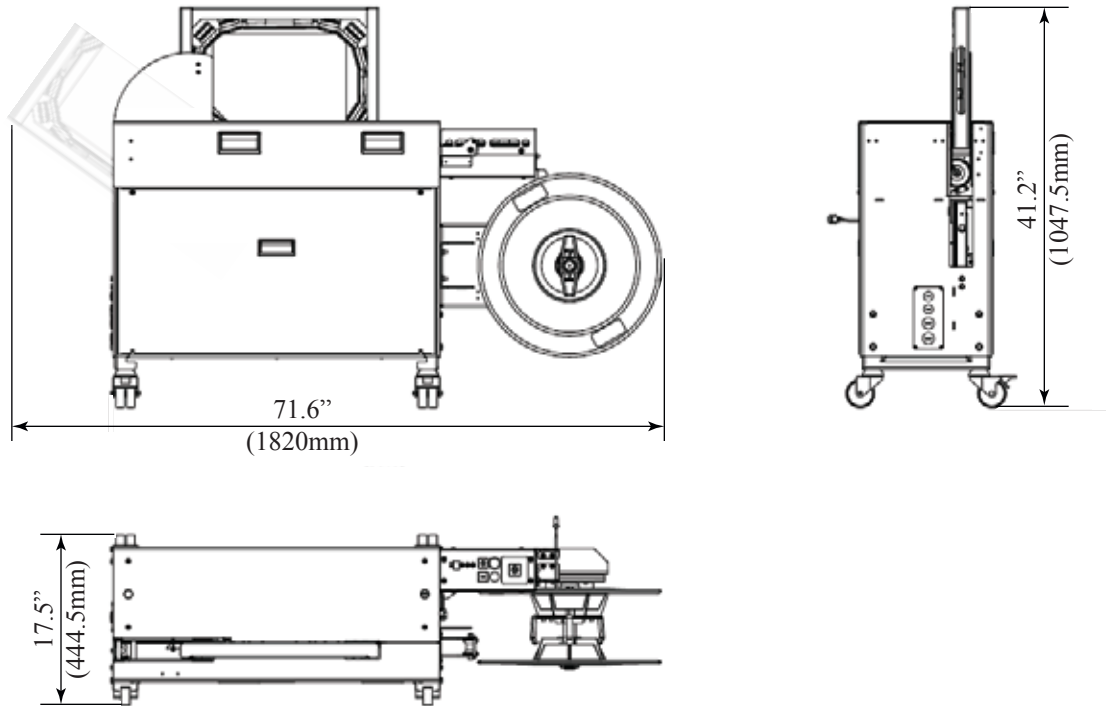

Technical Specifications

CAPACITY:

Single strap, bundles/minute up to: 20
Depending on tension force

BUNDLES:

Width in mm
Min.: 40
Max.: 250
Height in mm
Min.: 5
Max.: 170
Max. bundle height depending on arch size
Weight in lbs.
Max.: 66

STRAP TENSION:

Adjustable with 10 steps
Automatic strap tensioning
Tension at bundle in Foot Pounds:
Max.: 240

STRAPPING MATERIAL:

Polypropylene DIN EN 13 394
Width in mm: 5 - 12
Thickness in mm: 0.4 - 0.65

SEALING METHOD:

Heat seal. Tensile strength of welded joint is approx. 80% of the breaking strength of the strap

STRAP COIL:

Core ID in mm: 200 - 228
Core OD in mm: 420
Width in mm: 160 - 190

POWER SUPPLY:

Wide Range Input 100-240V, 1AC; 47-63 Hz
Maximum fusing 16A (B-character)
Protection Type: IP 22

POWER CONSUMPTION:

Power consumption in kW approx.: 0.25

WEIGHT:

Total weight approx. in lbs: 386

OPERATING CONDITIONS:

Temperature range in °F [°C]: 41 [+5] - 113 [+45]