



Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com



TRS-1600G



TRS-2600G

TRS-1600G 63" Multiple Groove Rip Saw

TRS-2600G 102" Multiple Groove Rip Saw


Features:

- Designed to meet the exacting standards required for high quality ripping or grooving at panel production line use.
- Castaly rip saws are manufactured to precise tolerances, and feature the newest designs for operator safety and volume production.
- TRS-1600G for 63" width multiple rip cut to strip.
- Double anti-kickback fingers mounted at the infeed side provides maximum safety protection.
- Heavy-duty industrial TEFC motor ensures full depth cutting capacity in all materials.
- Ruggedly constructed sheet metal frame for durability and extended machine life.

- The variable feed speed allows the machine to meet the cutting requirements of different materials.
- Powered upper & lower pressure rollers for precise cutting.
- The saw arbor is manufactured from alloy steel for dependability and anti-fatigue, heat treated, precision ground and balanced providing precise cutting performance.

SPECIFICATIONS	TRS-1600TB	TRS-2600G
Max. Working Width	63"	102"
Min. Working Length	26"	26"
Working Thickness	1/8" ~ 1"	1/4" ~ 1"
Feed Speed	9 ~ 38 FPM	9 ~ 38 FPM
Saw Blade Size	8"	8"
Saw Blade Speed	2600 RPM	2600 RPM
Top Pressure Rollers	6	4
Bottom Pressure Rollers	6	4
Saw Motor	20 HP	30 HP
Feed Motor	4 HP	5HP
Machine Size (L x W x H)	95" x 69" x 47"	114" x 37" x 49"

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)

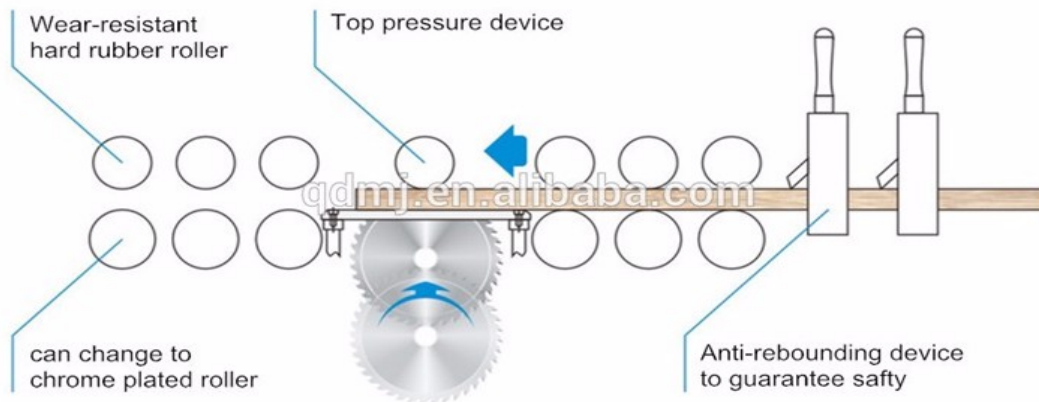



[TRS-1300 to TRS-2600G Transfer Line](#)

