



Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com



SM-236U 9" 6 Spindle with 1 Universal Head
SM-237U 9" 7 Spindle with 1 Universal Head

Features:


- Hard chrome-plated table for maximum wear resistance.
- Full enclosure safety guard reduces noise and completely prevents chips from splashing.
- Anti-impact plate for over-width and over-thickness protection.
- Over sized top and bottom rollers run synchronized, ensuring smooth feeding.
- FRP plastic steel safety guard features maximum durability and impact resistance.
- The three independent section pneumatic pressures for the infeed rollers, in-process rollers and outfeed rollers can be set with individual pressure allowing for consistent feeding results and outstanding effect.
- The smooth initial feeding of the stock is achieved by the independently powered infeed rollers.
- Exclusively designed template inserted pressure plate suits various stock thickness and profile variations.
- Special pressure plate adapted with table feeding roller design, provides smooth and precise cutting of dry and wet wood, reducing the possibility of material jams.
- The machine base is one piece coated from high quality cast iron (FC-25) for maximum stability of structure.
- Base is machined by CNC machine equipment to ensure the utmost working accuracy.
- The first bottom horizontal spindle can fit with a trimming cutter for trimming a groove on the workpiece side to achieve perfect straightness.
- The specially designed short stock feeding mechanism combined with auxiliary pressure wheels permits the machine to perform machining on extra short stocks.
- All spindles are precision constructed and specially heat treated to provide maximum cutting stability and permanent accuracy.
- Each spindle is provided with a mechanical digital readout, giving accurate adjustment.
- Every cutter spindle can be adjusted "up and down" and "in and out" for quick setup.
- Industrial full power motor for maximum cutting capacity.
- Precision sealed long-life high speed ball bearing.

SPECIFICATIONS	SM-236U	SM-237U
Max. (Min.) Working Width	9" (3/4")	9" (3/4")
Max. (Min.) Working Thickness	4-3/4" (5/16")	4-3/4" (5/16")
Min. Working Length	9½"	9½"
1st Spindle Horsepower	10 HP	10 HP
2nd, 3rd Spindle Horsepower	10, 10 HP	10, 10 HP
4th, 5th, 6th Spindle Horsepower	15, 15 HP	15, 15, 15 HP
6th Universal Spindle House Power	5.5 HP	~
7th Universal Spindle House Power	~	5.5 HP
Feed Motor	7½ HP	7½ HP
Elevation	1½ HP	1½ HP
Spindle Diameter	40 MM	40 MM
Cutter Speeds (RPM)	6500	6500
Variable Feed Speeds (FPM)	16 ~ 82	16 ~ 66
Cutter head Diameter		
1st Bottom Head	4" ~ 5"	4" ~ 5"
2nd ,3rd Vertical Head	5" ~ 6-1/4"	5" ~ 6-1/4"
Top Head	5" ~ 7"	5" ~ 7"
Last Bottom Head	5" ~ 7"	5" ~ 7"
Pneumatic Air 90 PSI (CFM)	5	5
Dust Outlet Diameter	5" x 6	5" x 7
Machine Size (L x W x H)	161" x 64" x 73"	181" x 64" x 73"
N.W. (LBS)	9800	10200
G.W. (LBS)	10700	11060

The price is F.O.B. Los Angeles Ca. USA. Tooling, rigging, freight & sales taxes are not included.



The universal shaft system is designed specially for machining various complicated products.

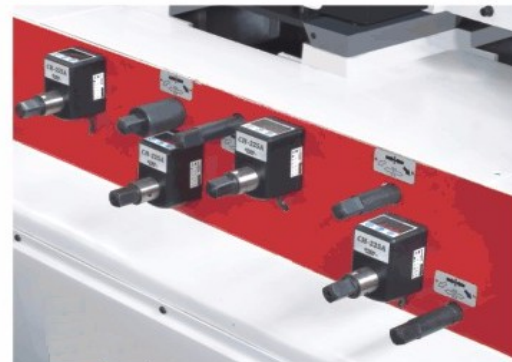

Digital displayer shows working dimension features convenience and promptness.

