





**Authorized Dealer:**  
Global Sales Group, LLC  
P.O. Box 1835 \* Chico, CA 95927  
Toll Free: 877-474-5521  
Office: 530-893-2444  
www.globalsalesgroupllc.com

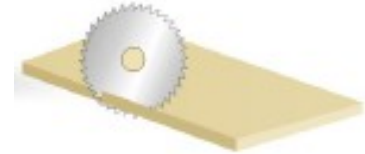

## TRS-1112 12" Single Rip Saw

### Options:



- AF-RT EXTION ROLLERS SIDE TABLE
- LA-6000 LASER BEAM LIGHT

### Features:

- Their precision machining and attention to operator safety and the production needs make these machines some of the most cost effective machines available in the world today.
- Hard chrome-plated table for maximum wear resistance.
- Precision fence ensures absolute accuracy between blade & fence, equipped with measuring ruler gauge.
- **Double anti-kickback fingers** mounted at the infeed end provides maximum safety protection.
- Heavy-duty industrial motor for powerful cutting capacity.
- Ruggedly constructed sheet metal frame for durability usage.
- The variable feed speed enables the machine to meet different requirements of work.
- V-way track and chain block surface are heat-treated for long wear resistance.
- Automatic lubrication to V-Way track facilitates chain running smoothly.
- Precision built saw head ensures accuracy for straight line rip saw operations.
- The saw arbor is manufactured from NI-Cr-MO alloy steel for durability and anti-fatigue, heat treated, precision ground and balanced providing precise cutting performance.
- Four bearing spindle mount ensures rigidity & long life.
- Four pressure rollers for precise cutting of large and small workpieces.
- Heavy-duty cast iron table.

SPECIFICATIONS	TRS-1112	TRS-0012	TRS-3016	TRS-3018
Maximum Cutting Depth	3-3/8"	3-3/4"	3-1/2"	4-3/4"
Arbor Diameter	1"	1"	1"	2"
Max. Amount of Blades Per Spindle	1	1	1	1
Saw Blade Size	12"	12"	12" ~ 16"	14" ~ 18"
Table Dimensions	28" x 61"	33" x 59"	43" x 69"	58" x 78"
Spindle Speed	3300 RPM	4500 RPM	3600 RPM	3600 RPM
Feeding Speed (RPM)	30 ~ 72	30 ~ 85	0 ~ 90	30 ~ 85
Throat to Blade Depth	15"	15"	19"	26"
Main Motor	10 HP	10 HP	15 HP	20 HP
Feed Motor	1 HP	1 HP	2 HP	3 HP
Feed Chain Width	6"	6"	7"	8-3/4"
Automatic Lubrication	YES	YES	YES	YES
Minimum Workpiece Length	12"	12"	6"	8"
Exhaust Hood Diameter	4"	4"	4"	4"
N.W.	1960 LBS	1870 LBS	3200LBS	3800LBS
G.W.	2130 LBS	2000 LBS	3900 LBS	4600 LBS

(Training and installation, tooling & rigging are optional)  
 (Customer is responsible for local regulations and connecting utilities)

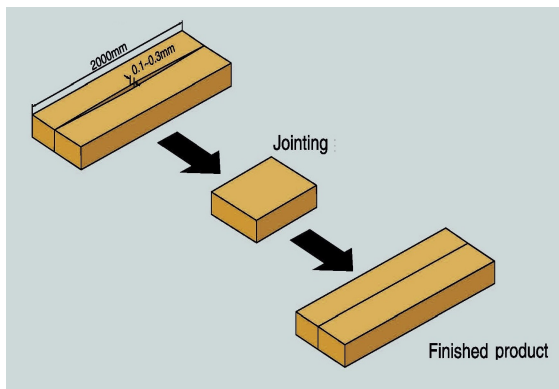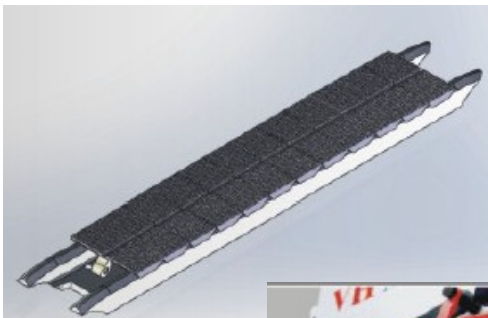

**Automatic Lubrication**  
 The auto lubrication device is equipped with an alarm light and send signals upon a lack of lubrication oil to increase the durability of the machine.



**Laser Optional**  
 Available to be fitted with laser unit and can p review precision of the saw path in advance for long length of the woodworking pieces with less loss on the material.