



PW120E

OSCILLATING EDGE SANDER

Authorized Dealer:

Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com





PW120E


OSCILLATING EDGE SANDER



TILTING TABLE 0 - 45°



TILTING TABLE LOCKING MECHANISM WITH ANGLE INDICATOR

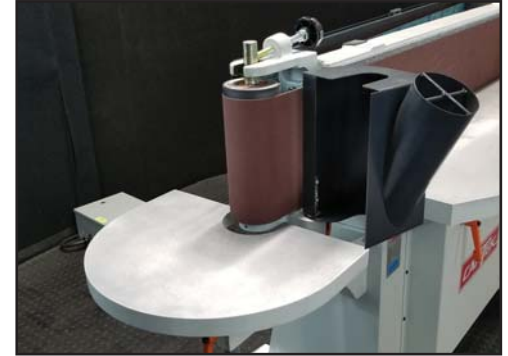


END TABLE FOR CURVE SANDING



CSA MAGNETIC SWITCH



RUBBER COVERED DRIVE ROLL WITH FLIP OPEN GATE FOR SANDING LONGER PIECES

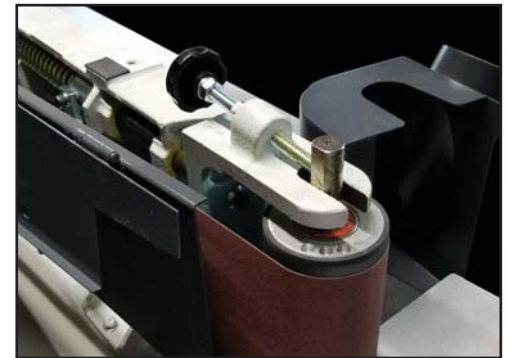

EASY ADJUSTMENT FOR BELT TRACKING

FEATURES

- Tilting main table with a 0° to 45° ruler.
- Tilting corner table, with adjustable height, for curved work piece sanding.
- 120° miter gauge for precise sanding.
- Two(2) parallel shafts mounted on a bushing system assuring a smooth and easy height table adjustment.
- Both rollers are rubber coated which give the ability of the small roller to do a smooth finish on curved pieces. Also it gives to the large drum a better traction so the belt doesn't slip.
- Fast and easy belt replacement and belt oscillation adjustment.
- Door that gives you accessibility to sand long timbers.
- Standard magnetic control including overload protection and emergency stop.
- Two(2) 4" dust hood.
- Available on 230, 460, or 600 V / 3 Ph.
- Models of oscillating belt sanders with two(2) stations available.

SPECIFICATIONS

Working Capacity (LxH)	47" x 8" (1200mm x 200mm)
Belt Size (LxH)	138 1/2" x 9"
Sanding Belt Speed	1080 m/min (3544 FPM)
Motor	3HP: 230 volt 3 phase
Machine Dimensions (LxWxH)	82.7" x 24.4" x 40.2" (2100 x 620 x 1020mm)
Shipping Dimensions (LxWxH)	86.6" x 28.4" x 45.3" (2200 x 720 x 1150mm)
Net Weight	682 Lbs. (310 kgs.)
Shipping Weight	792 Lbs. (360 kgs.)