

Dimensions	a	b	c ₅	d	d ₁	e	e ₁	g	h
VC-DR060	645	380	40	G2"	G2-12"	423	216	612	225
VC-DR090	645	380	40	G2"	G2-12"	423	216	612	225
VC-DR130	645	380	40	G2"	G2-12"	423	216	612	225
Dimensions	h ₁	h ₂	h ₃	l	k	k _m	o	r	s
VC-DR060	388.5	426	494	125	684	1092	171.5	50	M10
VC-DR090	388.5	426	494	125	684	1092	171.5	50	M10
VC-DR130	388.5	426	494	125	684	1092	171.5	50	M10



Dry Rotary Vane Vacuum Pump

Features:

- Single stage rotary vane vacuum pump is directly connected to the outer covers of aluminum alloy pump with the electrical motor, for efficient and heat dissipation.
- The pump is advanced in stable functioning and low noise for acquiring high vacuum pressure, high water vapor tolerance.
- Dry operation for oil-less and direct drive with no belts or gears to ensure low energy consumption usage.

- Compact construction, light weight, low noise.
- Equipped with the suction filter and exhales muffler, with large filter area and quick change lock for easy maintenance.
- TEFC motor.

Model	VC-DR075	VC-DR100	VC-DR130
Power (KW)	5.5	7.5	11
Power (HP)	7.3	10	14.7
Air Flow (cfm)	168	176	225
Vacuum Capacity (in. Hg)	24	26	27
Noise Level (dB A)	81	82	82.5
Motor Speed (RPM)	1150	1210	1720
Weight (LBS)	616	616	627
Machine Size (L x W x H)	42" x 24" x 20"	44" x 24" x 20"	46" x 24" x 20"

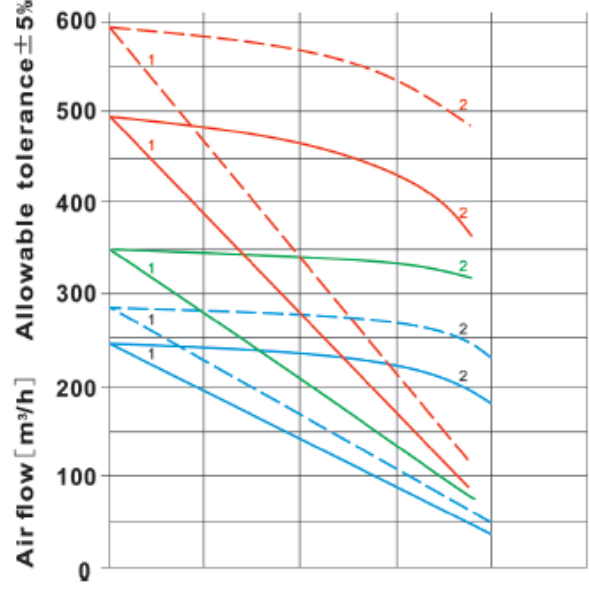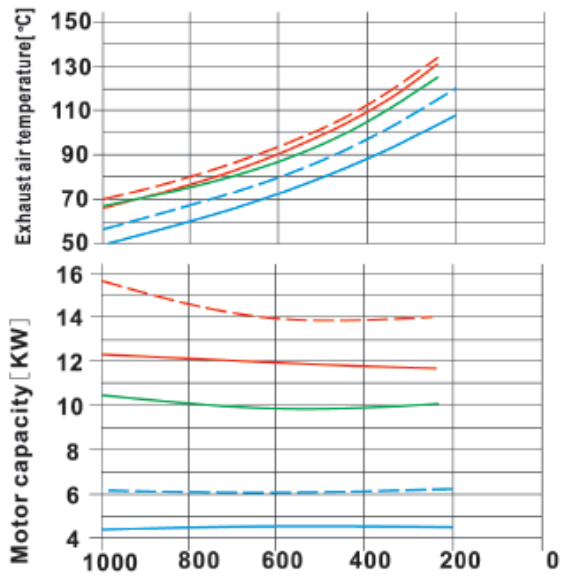

Standard Accessories



Air Filter



Pressure Relief Valve



Silencer

Authorized Dealer:
 Global Sales Group, LLC
 P.O. Box 1835
 Chico, CA 95927
 Toll Free: 877-474-5521
 Office: 530-893-2444
 www.globalsalesgroupllc.com