




Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

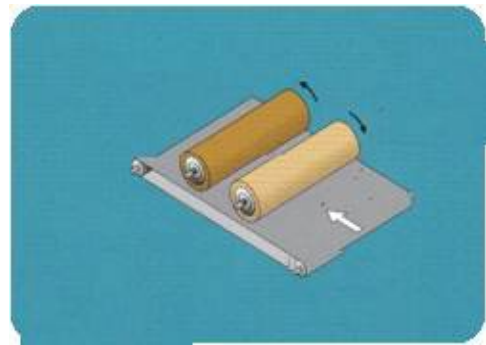


DS-2500 25" Double Drum Sander
DS-3700 37" Double Drum Sander

Features:

- Easy operation with performance for sanding flat objects.
- Heavy sheet metal cabinet stand.
- Balanced cast aluminum sanding drums.
- Two different grits and level sanding drums are designed for fast and fine finish at one pass.
- First drum is cast aluminum; second drum is coated with rubber for fine sandpaper.
- Automatic feeding operates by non-slipping rubber grips conveyor.
- Raise or lower the table easily by large hand wheel.
- Three spring-loaded pressure rolls keep the object flat on conveyor without sliding.
- Powerful industrial motor for durability usage.
- Magnetic switch with overload protection.
- Precision sealed long-life bearing.

SPECIFICATIONS	DS-2500	DS-3700
Max. Sanding Width	25"	37"
Max. Sanding Thickness	4"	4"
Table Dimensions	25" x 34¼"	37" x 34¼"
Sanding Drum Dia.	6"	6"
Speed of Sanding Drum	1700 RPM	1700 RPM
Feeding Speed	12 FPM	12 FPM
Sanding Speed	5 HP	5 HP
Feeding Motor	¼ HP	¼ HP
N.W.	1050 LBS	1120 LBS
G.W.	1180 LBS	1270 LBS

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)

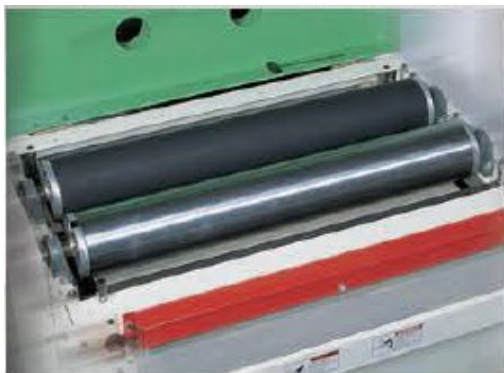


TWO SANDING DRUM CONFIGURATION

The front steel drum provides smooth surface effect.
 The rear drum is rubber to create fine finish surface.



Efficient dust system design

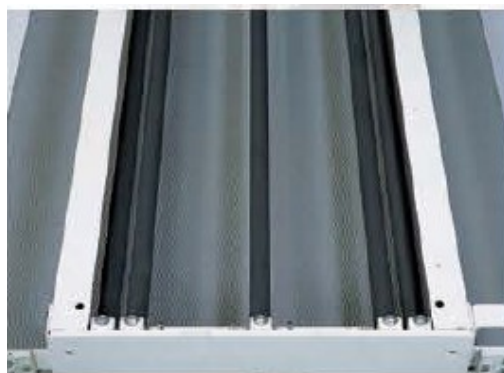

Specially designed five pressure rollers ensure safety and stability of sanding operation.