




Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

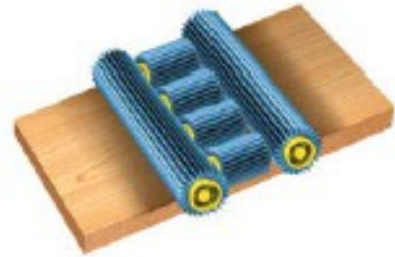


WS-1000H 40" Orbital 2 Brush Sander Machine
WS-1300H 51" Orbital 2 Brush Sander Machine

Features:

- This model is especially suited for more irregular surface with less flat top surface sanding (other designs are available).
- Designed for solving irregular or profile surface sanding problems easily and quickly such as sculptured panels, bas-relief or beehive, various profiles of panel inserts, window and raised panel door frames, sculptured doors.
- Also, it does a very good job for fine finish, lacquered sanding such as solid wood, veneer, lacquered panel sanding, and burr cleaning.
- The panel pressure device is specially designed to handle small pieces of stock. It requires no vacuum, saving space and cost.
- The new machine structure consists of two reversible crosswise brush spindles, combined with reversible running and reciprocating of 4 ~ 5 short longitudinal brush spindles, permitting cross and longitudinal sanding to be performed simultaneously.
- Any type of irregular surface can be sanded easily and quickly.
- Simply loosen two screws and the sanding belt or brush can be conveniently and quickly replaced. No dismantling of bearing is necessary.

SPECIFICATIONS	WS-1000H	WS-1300H	WS-1000EB	WS-1300EB	WS-1000HB	WS-1300HB
Max. Working Width	40"	51"	40"	51"	40"	51"
Max. Working Thickness	5"	5"	5"	5"	5"	5"
Wide Belt Motor	---	---	10 HP	15 HP	10 HP	15 HP
Sanding Belt Size	---	---	40" x 75"	51" x 75"	40" x 75"	51" x 75"
Lateral Brush Motors	2 HP x 2	2 HP x 2	2 HP x 2	2 HP x 2	2 HP x 2	2 HP x 2
Vertical Brush Motors	½ HP x 4	½ HP x 5	---	---	½ HP x 4	½ HP x 5
Dia. of Sanding Brush	12"	12"	12"	12"	12"	12"
Feed Motor	2 HP	2 HP	2 HP	2 HP	2 HP	2 HP
Clean Brush Motor	½ HP	½ HP	1 HP	½ HP	½ HP	1 HP
Table Hoist Motor	½ HP	½ HP	1 HP	½ HP	½ HP	½ HP
Var. Feed Seed (FPM)	10 ~ 40	10 ~ 40	10 ~ 40	10 ~ 40	10 ~ 40	10 ~ 40
N.W. (LBS)	5700 LBS	6250 LBS	7100 LBS	7700 LBS	7700 LBS	8600 LBS
G.W. (LBS)	6400 LBS	7050 LBS	7700 LBS	8500 LBS	8400 LBS	9400 LBS

(Training and installation, tooling & rigging are optional)
(Customer is responsible for local regulations and connecting utilities)

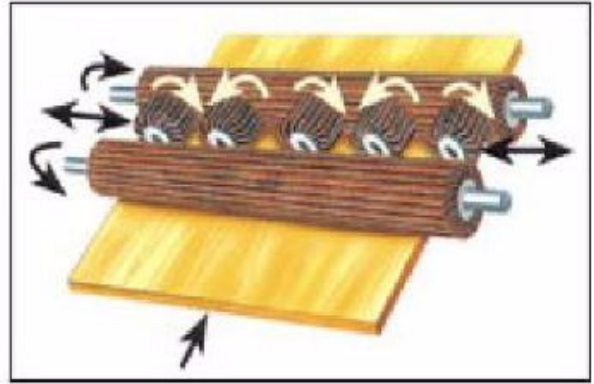


Standard Brush Heads




Optional Nylon / Steel Wire Heads





H Type
Suited for more irregular surfaces with less surface sanding.


















HB Type
Suited for complicated irregular surface with surface sanding.




HBE Type
Suited for simple irregular surfaces with more surface sanding.



Various sanding head configurations for choice

 H	 H1	 HA3
 HA3A	 H3B	 H5
 H5A	 HA4	 HA
 HA3	 HA4	 HA5
 HB	 HBE	

**Customer's design available.



Long crosswise spindle



Short longitudinal spindle