



JLH SERIES

12" & 16" JOINTERS



J127LH
12" Jointer



J168LH
16" Jointer



Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835
Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

PMB #104 1124 Fir Avenue
Blaine, WA 98230

T: 1.888.982.2683
F: 604.540.1780

Youtube // @CantekMachinery
Twitter // @CantekMachinery

www.cantekamerica.com
sales@cantekamerica.com




JLH SERIES

12" & 16" JOINTERS




HEAVY DUTY CONSTRUCTION
Solid cast iron table which is precision ground & polished for a smooth and accurate jointing surface.

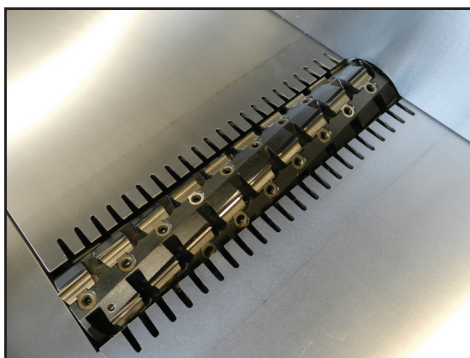


SPIRAL INSERT KNIFE CUTTERHEAD
Equipped with a spiral insert knife cutterhead with 2-sided 30x12x1.5mm replaceable insert knives which provides a superior finish & ultra-quiet operation.



TABLE RAISING & LOWERING MECHANISM
The parallelogram design enables the table to travel in the same arc as the cutterhead which maintains a close & uniform distance for a safe operation regardless of the cutting depth.

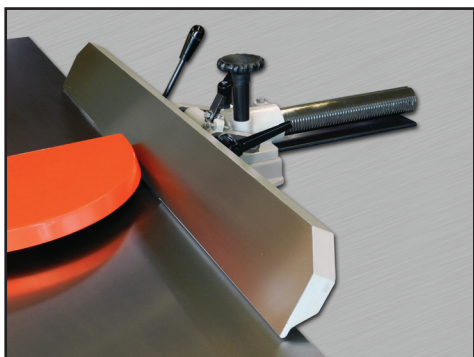

HEAVY DUTY CENTER MOUNTED FENCE
The large cast-iron fence is center mounted and adjusted in / out by rack & pinion. It can also be tilted with positive stops of 45, 90, 135° & can also be locked at any angle.

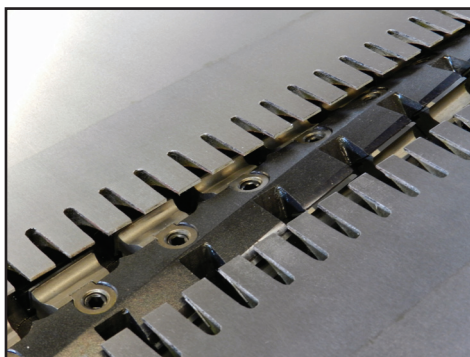

NOISE REDUCTION TABLE LIPS
Both infeed and outfeed tables are equipped with unique noise reduction table lips which are contoured close to the cutterhead for safe and quiet operation. Also equipped with a rabbeting ledge on the infeed table with a Max. Depth of 3/4"



SAFETY GUARD
The spring loaded safety guard moves only when the workpiece is being fed. The guard will return to its original position upon completion of the cut ensuring a safe operation.

FEATURES

- Available in 12" & 16" working widths
- Long cast iron work tables ensure a sturdy work surface to producing a precision jointed edge
- A spiral insert knife cutterhead ensures a quiet operation while providing a superior finish with long blade life
- Accurate parallelogram design enables table to travel in the same arc as the cutting circle, maintaining close uniform clearance between the table lip and cutterhead for safest operation regardless of cutting depth
- Convenient handwheels are provided for locking the table(s) in position
- Comes with a 4" dust chute which is guided directly under the cutterhead for superior chip / dust removal
- Equipped with a CSA / UL magnetic switch

SPECIFICATIONS

	J127LH	J168LH
Motor	5 HP – 3 Phase 3 HP – 1 Phase	7 ½ HP – 3 Phase
Max. cutting width	12"	16"
Max. depth of cut	3/4"	3/4"
Table size	12 x 84" long	16 x 96" long
Cutter RPM	5000 RPM	5000 RPM
Cutting circle	4 3/32"	4 3/32"
Cutterhead inserts	30 x 12 x 1.5mm (44 pcs)	30 x 12 x 1.5mm
Dust extraction	4" outlet	4" outlet
Machine dimensions	85.25" x 36" x 37"	97" x 40" x 37"
Net weight	740 lbs.	990 lbs.
Shipping dimensions	88" x 26" x 38"	99.9" x 28.8" x 38.2"
Shipping weight	880 lbs.	1210 lbs.