



# SRS330

14" STRAIGHT LINE RIPS AW



**Authorized Dealer:**  
Global Sales Group, LLC  
P.O. Box 1835 \* Chico, CA 95927  
Toll Free: 877-474-5521  
Office: 530-893-2444  
[www.globalsalesgroupllc.com](http://www.globalsalesgroupllc.com)




# SRS330


## 14" STRAIGHT LINE RIPSAW




**Heavy-Duty Hold Down Assembly**  
(8) hold-down rolls (6 rows) ensure workpiece is held firmly during cutting operations.

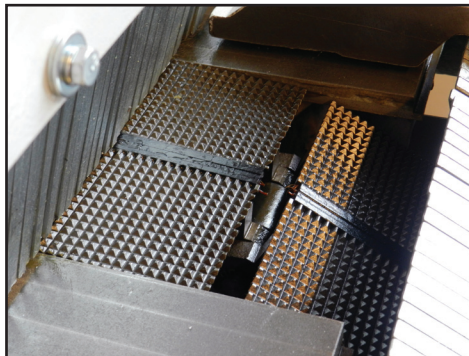

**Precision Caterpillar Chain Track**  
Runs on double "V" guide rails are made of special cast iron for high wear resistance with tight tolerances. High Frequency Hardened chain track now provides up to 3-times the wear life over non treated tracks

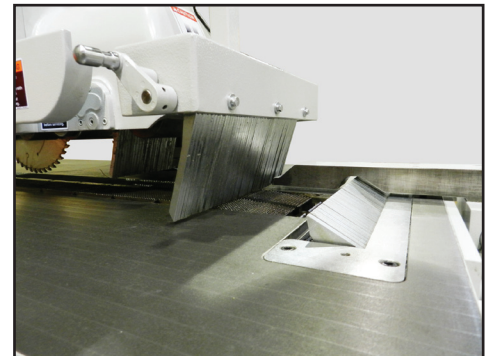

**Anti Kickback Assembly**  
(3) sets of anti-kickback fingers for safe operation. (2) top & (1) set in the table.

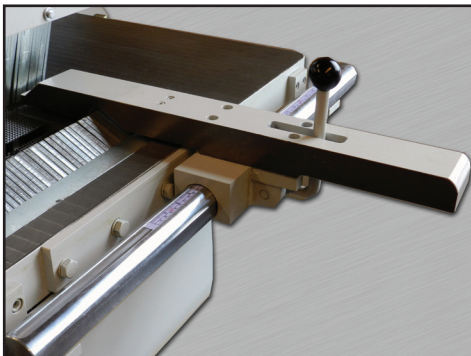

**Precision Rip Fence Assembly**  
Quick setting rip fence runs on round cylindrical guide for effortless & accurate adjustment.



**Automatic Centralized Lubrication**  
Automatic mechanical lubrication of the chain/track assembly to ensure long life. Automatic oil level sensor will shut machine off if level is too low.



**Optional Alignment Laser**  
Alignment laser aids in optimizing rip operations to ensure maximum yield is achieved.

## FEATURES

- Very rigid machine body with a welded steel frame with an integral cast & machined table, which is fitted with a sturdy cast column & saw head assembly
- Absolute straight line feeding with glue joint up to 13 ft.
- Precision build saw arbor
- Precision built saw arbor constructed of nickel chrome steel is ground & precision balanced.
- Arbor runs in precision angular contact type ball bearings which eliminates any radial run-out & axial thrust
- VFD - Infinitely variable feed system with feed speeds of 30-130 fpm (10-40m/min)
- User friendly overhead mounted control panel
- Soft start - Star Delta starter
- Telemecanique magnetic starters to UL/CSA standards
- Useable chain length 47"
- Swing Down Rear Table - to prevent damage to the table chain area
- 14" Sawblade included

## SPECIFICATIONS

Maximum work piece thickness	4.33"
Minimum work piece length	8"
Distance between saw and column	18.1"
Saw arbor diameter	1"
Saw blade diameter	10" - 14"
Saw arbor speed	4300 rpm
Useable chain length	47"
Glue line guarantee	13' (+/- 0.0098" or 0.25mm)
Feed speeds variable	30 to 130 FPM
Arbor motor	20 HP
Feed motor	2 HP
Dust collection outlet	4"
Table size	36.6" x 64.6"
Table height	31-7/8"