



**Authorized Dealer:**  
Global Sales Group, LLC  
P.O. Box 1835 \* Chico, CA 95927  
Toll Free: 877-474-5521  
Office: 530-893-2444  
www.globalsalesgroupllc.com



## **TS-P3200AU 10' Sliding Table Panel Saw (Auto Height)**

(Training and installation, tooling & rigging are optional)

### **Features:**

- Automatic digital control for the saw blades height.
- Manual tilting angle adjustment.
- Heavy-duty construction, vibration-free operation. Easy to set up and quickly adjusts.
- Saw blade moves up or down is driving by electric motor.
- Scoring unit for clean accurate chip-free cutting, ready for edge banding.
- Saw shaft bearings lubricated for life, supported with anti-vibration and noise rubbers.
- Special primers and finish for long-term protection.
- High accuracy, free movement sliding table without wear resistance. Specially designed double rollers carriage made by aluminum profile.
- Stable, torsion-free cross slides with easy running swinging arm.
- The table to be assembled integrally to the sliding carriage which works carefully both on movable parts, and sliding system warrants absolute stiffness of the whole carriage.
- Telescopic crosscut fence stop extensible to 10 feet.
- The base is welded from cold rolling steel plate, offers rugged construction.
- Industrial full power motor for heavy cutting capacity.






## TS-P3200PL 10' Sliding Table Panel Saw (Program Position)

### Features:

- Saw blade moves up or down, tilting and fence movement driven by electric servo motor.
- 200 sets of Memory, program control for the rip fence, saw blade height and tilting angle
- Employed with touch control screen for convenient operations
- Digital read out for the stop at rail
- Heavy-duty construction, vibration-free operation. Easy to set up and quickly adjusts.
- Scoring unit for clean, accurate chip-free cutting, ready for edge banding.
- Saw shaft bearings lubricated for life, supported with anti-vibration and noise rubbers.
- Special primers and finish for long-term protection.
- High accuracy, free movement sliding table without wear resistance. Specially designed double rollers carriage made by aluminum profile.
- Stable, torsion-free cross slides with easy running swinging arm.
- The table to be assembled integrally to the sliding carriage which works carefully both on movable parts, and sliding system warrants absolute stiffness of the whole carriage.
- Telescopic cross cut fence stop extensible to 10 feet.
- The base is welded from cold rolling steel plate, offers rugged construction.
- Industrial full power motor for heavy cutting capacity.

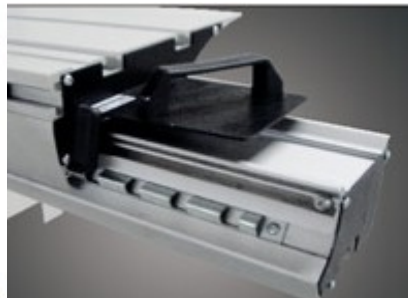

SPECIFICATIONS	TS-P3200AU	TS-P3200PL
Sliding Carriage Dimensions	126" x 17.1"	126" x 17.1"
Cross Cut Capacity	126"	126"
Max. Width Between Saw Blade & Square Fence	49.2"	51.2"
Saw Blade Inclination (Automatic)	0° ~ 45°	0° ~ 45°
Max. Height of Cut	5.3"	5.3"
Main Saw Maximum Blade Dia.	350 MM (14")	400 MM (15 3/4")
Saw Blade Shaft Dia.	30 MM	30 MM
Blade Rotation Speed (RPM) 3 SPEEDS	3000-4000-5000	3000-4000-5000
Saw Blade Motor Power	7 1/2 HP	7 1/2 HP
Scoring Saw Blade Dia.	125 MM (5")	125 MM (5")
Saw Blade Shaft Dia.	20 MM	20 MM
Blade Rotation Speed (RPM)	8000	8000
Scoring Motor Power	1 HP	1 HP
Saw Blade Up & Down Motor	1/4 HP	1/4 HP
Power	220V 3PH	220V 3PH
Machine Size	128" x 138" x 35"	132" x 142" x 35"
N.W.	1853 LBS	2376 LBS



#### Sliding table :

The sliding table is made out of a heavily ribbed aluminum extrusion which is anodized to ensure a long surface life. The strong structure makes it easy to sustain heavy object.



#### Crosscut fence:

The heavy duty outrigger makes it easy to sustain big panels and the crosscut fence can be positioned at the front or back for easy operation and is excellent in accuracy.



♦ Miter fence with 0° to 45° adjustment for small cutting jobs



♦ Quick and secure locking wood pressure



♦ Efficient dust collection system