





Authorized Dealer:
 Global Sales Group, LLC
 P.O. Box 1835 * Chico, CA 95927
 Toll Free: 877-474-5521
 Office: 530-893-2444
 www.globalsalesgroupllc.com

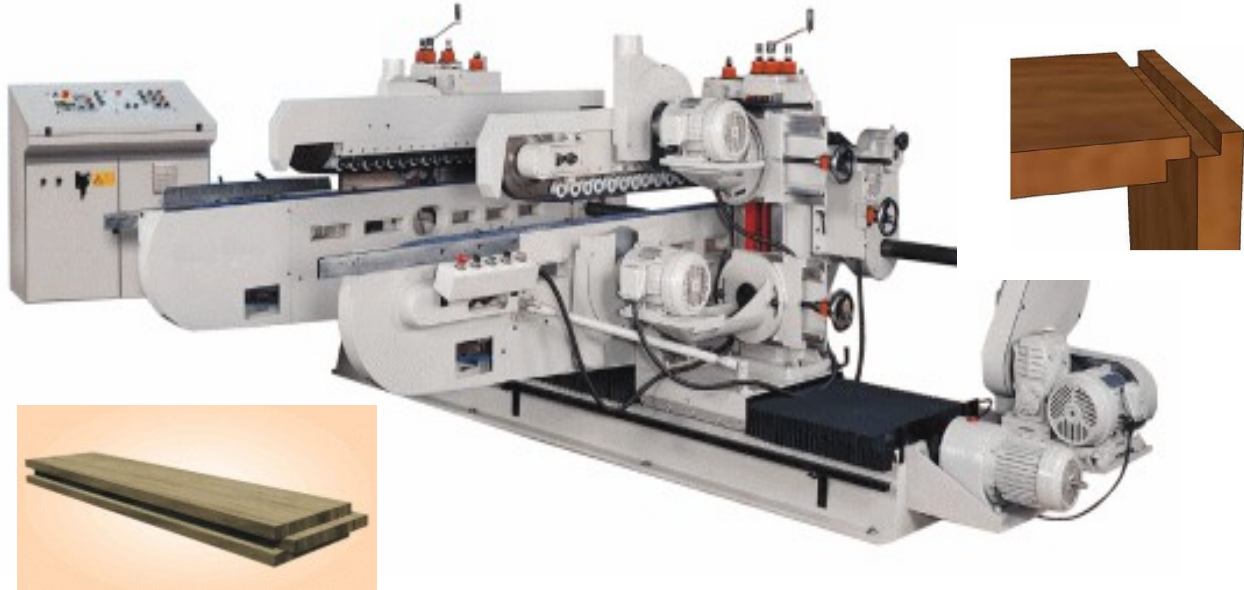


SET-86DET 6 Head Through Feed Double End Tenoner
 Standard (Top Scoring Saw, Bottom TrimSaw, Station Shaper)

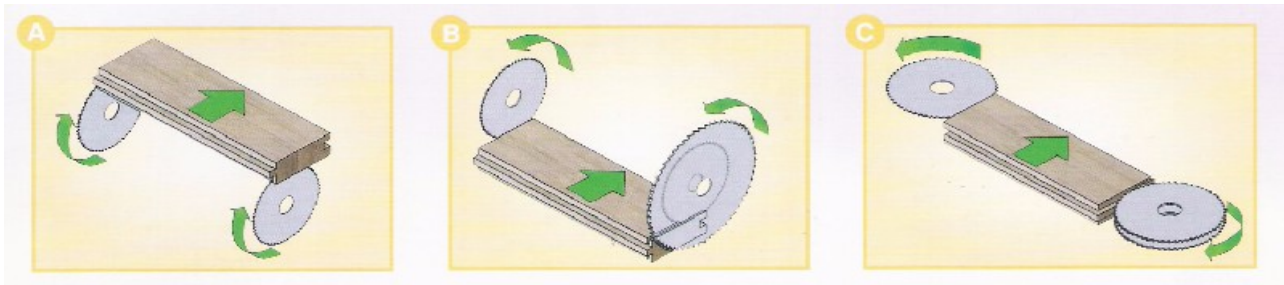

SET-88DET 8 Head Through Feed Double End Tenoner
 Standard (Top Scoring Saw, Bottom TrimSaw, , Jump Shaper, Station Shaper)

SET-88DET-J 8 Head Through Feed Double End Tenoner
 Optional (Top Scoring Saw, Bottom TrimSaw, , Jump Shaper, Jump Shaper)

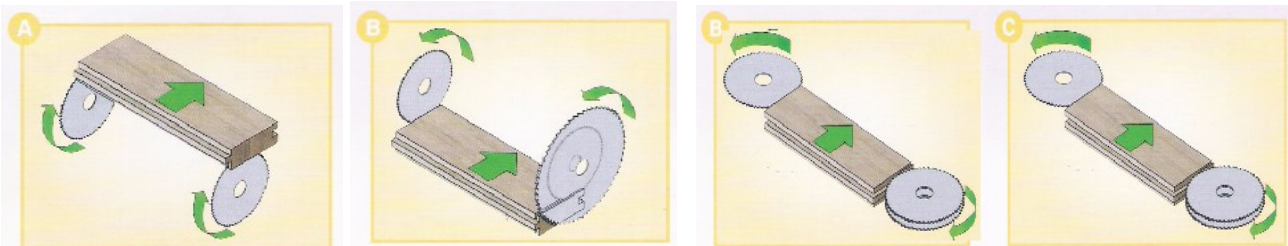



**Optional: Auto Feed Magazine
Total Enclosure Cover**

Features:

- The automatic high-speed through feed device allows for perfect finishing at speeds ranging from 20~66 FPM.
- Suitable for mass production of woodworking factory for processing of double end cutting, tenoning, grooving, moulding, and sanding.
- It is a powerful machine great for heavy-duty production.
- In addition to the double end cutting, all the settings and other processing can also be executed with high accuracy.
- Since the machine is so versatile, we believe it should be one of the most satisfactory equipments for bulk production lumber-processing factories.
- The specially designed numeric controller allows quick setting of sizes, for tolerance within 0.004”.
- Variable speed, through feed, wide rubber pad, spring loaded dots conveyor for the best finish selections.
- Heavy-duty powered pressure rolls at top of wide width conveyor to hold the material tight to prevent sliding during the cutting process.
- Shaper head can be moved up & down, forward & backward.
- Equipped with industrial motor for full power cutting and sanding capacity.
- Trim saw heads can be tilted for different angular setup.
- Heavy cast iron base for durability usage.


SPECIFICATIONS	SET-86DET	SET-88DET
Max. Working Thickness	3"	3"
Max. Working Length	96"	96"
Miter Saw Blade	12" x 1" Dia.	12" x 1" Dia.
Grooving Saw Blade	10" x 1" Dia.	10" x 1" Dia.
Shaper Cutter	6" ~ 10" x 1" Dia.	6" ~ 10" x 1" Dia.
Feed Speed	20' ~ 66' Variable	20' ~ 66' Variable
Motor	3 PH, 220/440 V	3 PH, 220/440 V
Scoring Saw Heads	2 HP x 2	2 HP x 2
Trim / Cut-Off Saw heads	3 HP x 2	3 HP x 2
Vertical Shaper / Coping Heads	7-1/2 HP x 2	7-1/2 HP x 2
Vertical Jump Shaper /Coping Heads	---	7-1/2 HP x 2
Feeding	2 HP x 1	2 HP x 1
Width Setting	1 HP x 1	1 HP x 1
Machine Size (L x W x L)	14' x 9' x 5'	14' x 9' x 5'
N.W.	9200 LBS	9200 LBS
G.W.	10400 LBS	10400 LBS



SET-86DET Scrolling Saw, Bottom Trim Saw, Shaper (3 Station x 2 Side)
SET-86DET Scrolling Saw, Bottom Trim Saw, Jump Shaper, Shaper (4 Station x 2 Side)



HMI Color Touch Screen

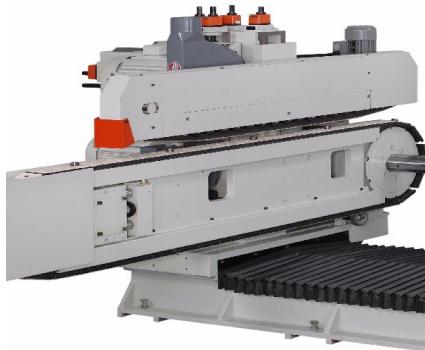

Standard



Optional: Enclosure Cover



Optional: Auto Transfer Line