Dowel Driver AT-400

The Dotul AT-400 Dowel Driver is a free standing single dowel insertion machine. The operator prealues the dowel hole, places the piece in front of the driver and presses on a foot pedal to insert the dowel. Dotul also offers machines that will make dowels. Ask your dealer for more information on these machines.

Features and Benefits

- The AT-400 dowel driver will drive 1/2" x 4" wood dowels to a preset depth into pre-alued dowel holes.
- Table shims allow for quick changes between $1^{3/8}$ " + $1^{3}/4$ " + $2^{1}/4$ " thick doors.
- The adjustable dowel driver rod will allow the operator to adjust the depth of the dowel to be driven into the pre-drilled dowel hole.
- The machine will drive the dowels as fast as the operator can pre-glue the dowel holes and press the foot pedal.
- The customer must specify the hole centers when ordering the dowel driver.

SPECIFICATIONS

Model -AT-400 90 PSI Air requirements -Floor space required -2'6" wide by 4' deep Driver rod length -½" x 9" adjustable 3/4" Adjustment for rod -4" dia. x 6" stroke Cylinder stroke -4" dia. x 2" stroke Clamp cylinder -Dowel hole spacing (must be specified) -11/2" 2" 21/4" 21/2" Table size -24" wide x 16" deep




- Dowel driver rod and hopper mechanism
- Alternating stroke cylinders prevent jamming of









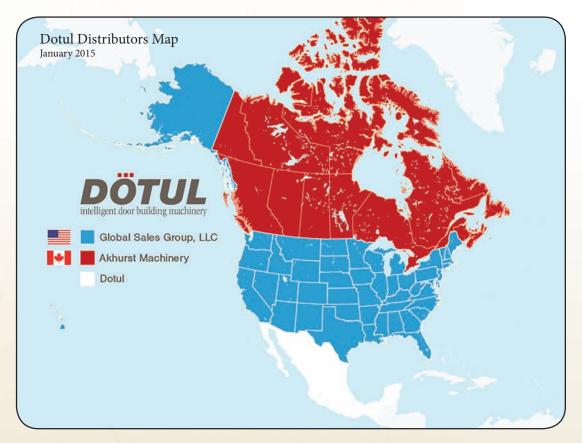





MSLBMDA

Member



Global Sales Group, LLC P.O. Box 1835 Chico, CA 95927 Toll Free (USA & Canada): 877-474-5521

Office: 530-893-2444 Fax: 530-893-2244

info@globalsalesgroupllc.com www.globalsalesgroupllc.com





Please visit our YouTube channel for more information on our products: **Global Sales Group LLC**



Akhurst Machinery 1669 Foster's Way Delta, BC V3M 6S7 Tel: (604) 540-1430 Toll Free: 1-888-265-4826 Fax: (604) 540-1780 Email: van@akhurst.com