Louver Door Router MT-250

Machine designed to route stiles for fixed slat louver doors, will also drill single holes for movable shutters, both left hand and right hand stiles when required, versatile routing and stile length capability.

Features and Benefits

- Small shop footprint
- Versatile hole routing
- Easy angle adjustments
- 0-90 degrees
- Hydraulic stile movement
- Stiles over 8 feet long
- Easy changeable bit diameter
- High RPM on router bits
- Allows for clean cut in hardwoods
- Large slot size & lengths
- Stiles from 3/4" to 4" thick
- Stiles from 1-1/2" to 5-1/8" wide
- Deep slot routs up to 1-3/16"
- 20 slots (40) per minute per pair

SPECIFICATIONS

Max. length of slot - 2" (50 mm)

Max. depth of slot - 1-3/16" (30 mm)

Max. distance between slots - 4" (100 mm)

Min. distance between slots - 13/64" (5 mm)

Slot Tilting Angle - 0-90 degree

Max. size of work piece - $4'' \times 5 - 1/8''$ (H x W)

Min. size of work piece - 25/64" x 1-3/16" (H x W)

Working Speed (each side) - 20 slots/min.

Cutter spindle speed - 12000 rpm


Cutterhead motor - 5 hp

Cutterhead oscillating motor - 1 hp

Work material movement - Air-Hydraulic

Machine size (L x W x H) - 158" x 45" x 47"

Machine Weight - 2100 lbs.

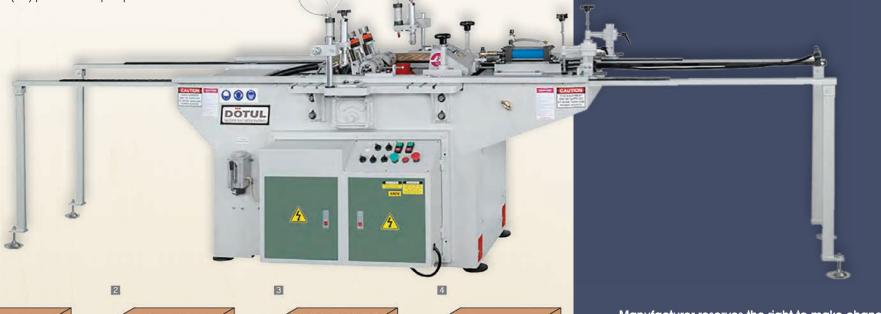










Manufacturer reserves the right to make changes and improvements on machinery as necessary.





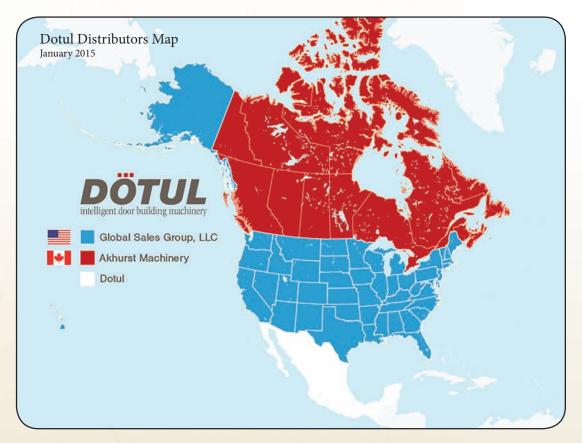





MSLBMDA

Member



Global Sales Group, LLC P.O. Box 1835 Chico, CA 95927 Toll Free (USA & Canada): 877-474-5521

Office: 530-893-2444 Fax: 530-893-2244

info@globalsalesgroupllc.com www.globalsalesgroupllc.com





Please visit our YouTube channel for more information on our products: **Global Sales Group LLC**



Akhurst Machinery 1669 Foster's Way Delta, BC V3M 6S7 Tel: (604) 540-1430 Toll Free: 1-888-265-4826 Fax: (604) 540-1780 Email: van@akhurst.com