




Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com



BS-800 32" Wood Band Saw
BS-950 36" Wood Band Saw

Optional:

- ST-18BF BAND SAW POWER FEEDER

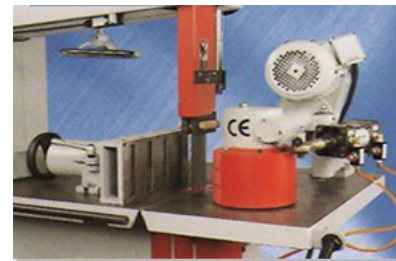

Features:

- The side guide is micro metrically adjustable providing convenient adjustment for narrow blades.
- The saw wheels are laminated with rubber for accurate blade tracking and slippage prevention.
- The table is made of cast iron and the surface is precision ground.
- The table can tilt to a maximum of 45-degrees front downward for bevel cuts.
- Blade tension can be conveniently adjusted by means of a band wheel. A tension scale allows the operator to correctly adjust the tension for different blade widths.
- The cast iron top and bottom saw wheels are precision machined and dynamically balanced for smooth running.
- The see through guard provides operator safety and protection.
- The foot brake permits the quick shut down of machine operations.
- The heavy gauge steel frame ensures stable and vibration-free cutting.
- 4" diameter exhaust chute supplied as standard.
- A foot pedal allows feeder fast swing away.

SPECIFICATIONS	BS-800	BS-950
Saw Wheel Diameter	32"	37"
Table Size	45" x 31-1/2"	45" x 32"
Distance between Blade & Column	30-5/8"	36-1/2"
Max. Cutting Height	15-3/8"	22"
Table Tilting	0 ~ 30	0 ~ 45
Blade Linear Speed	4944 FPM	5500 FPM
Length of Blade	217"	244"
Max. Blade Width	4"	2"
Dust Hood	4" x 2	4" x 2
Main Motor	15 HP	10 HP
Machine Size (L x W x H)	59" x 37" x 95"	64" x 33" x 113"
N.W.	1460 LBS	1550 LBS
G.W.	1750 LBS	1960 LBS

(Training and installation, tooling & rigging are optional)
 (Customer is responsible for local regulations and connecting utilities)

