


Authorized Dealer: Global Sales Group, LLC P.O. Box 1835 * Chico, CA 95927 Toll Free: 877-474-5521 Office: 530-893-2444 www.globalsalesgroupllc.com



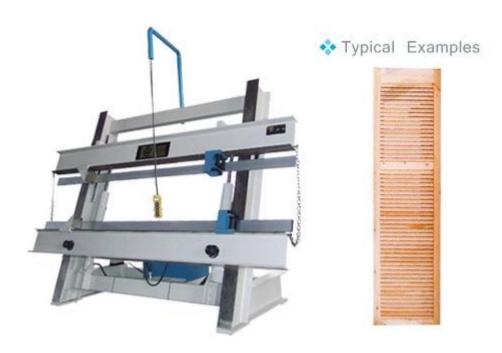

AP-2513 Hydraulic Frame Press AP-3017 Hydraulic Frame Press

Features:

- In order to promote the practicability of frame assembling for doors and windows, our company designed AP-2513 and AP-3017. These models are solidly constructed and welded with great precision machines.
- The outer structure of this frame assembling machine is made of two vertical beams which are individually located at the upper and the bottom side of the machine. Equipped with two vertical hydraulic cylinders, the vertical beams can be moved up and down to distribute the pressure evenly on the frame.
- The setting bumper of the square block can be moved to set the position manually, yet the mobile pressing platen of the square block and the vertical upper beam can be moved by the vertical hydraulic cylinder.
- Each operation can be completed with pressing the button. Equipped with hydraulic power, the machine has a manometer to read the pressure in use. It is also equipped with pressure adjuster to regulate the vertical and horizontal hydraulic cylinders in using the pressure which can perform the pressing operation precisely.
- Upon the other requests from our customers, we can also increase some optional items.

SPECIFICATIONS:

Model	AP-2513	AP-3017
Working Size	2500 ×1300 mm	3000 x 1700 mm
Vertical Cylinder Stroke	$80 \times 600 \text{ st} \times 2 \text{ pcs}$	80 x 800 st x 2 pcs
Side Cylinder Stroke	$50 \times 800 \text{ st} \times 2 \text{ pcs}$	50 x 1500 st x 2 pcs
Hydraulic Motor	2HP	2 HP
Machine Size (L×W×H)	3000 ×1200 × 2200mm	3600 x 1200 x 2500 mm
Machine Wt.	1200 kg	1600 kgs

(Training and installation, tooling & rigging are optional) (Customer is responsible for local regulations and connecting utilities)