







Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

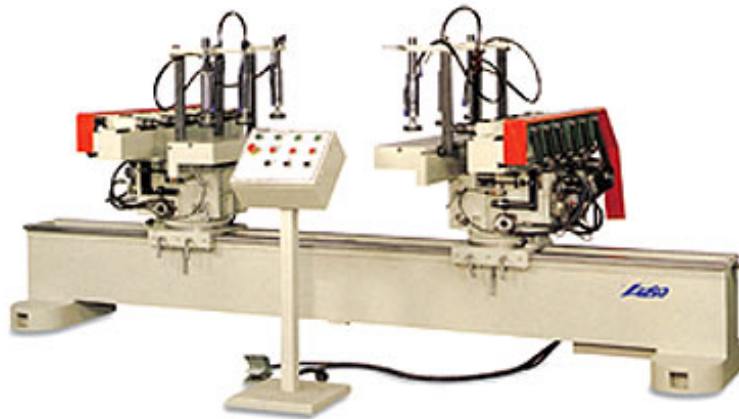


BR-2072 24" x 72" Two Side Horizontal Boring Machine

Optional:

- BR-52SD EXTRA SPINDLE WITH 5/8" CHUCK \$299.00
- BR-52MDC EXTRA SPINDLE FOR GEAR HEAD \$299.00
- BR-101 UNIVERSAL BORING HEAD \$1,290.00
- BR-103 HORIZONTAL BORING HEAD \$990.00

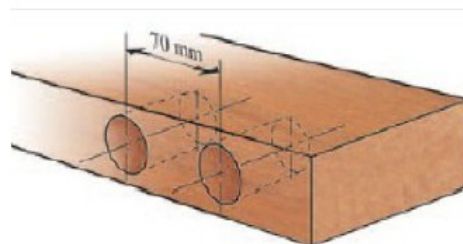

• Minimum distance between spindles

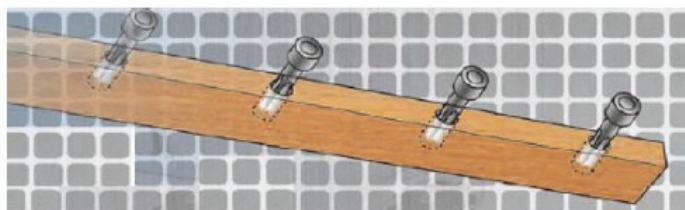


Features:

- The machine is constructed of two horizontal boring units.
- The boring units can be swiveled, making it suitable for boring panels on the right, left and front side, or bevel boring at desired angles.
- The boring unit can add more spindles or multiple drill head for less than 2" distance drilling.
- Standard 5 spindles on each boring unit, pneumatic and hydraulic in and out stroke controlled.
- Multiple gear heads is available.
- Each spindle can be horizontally adjusted in position quickly.
- Cast iron base and table for durable usage.

SPECIFICATIONS	BR-52	BR-54	BR-2072	BR-4080B
Motor (3 PH)	3 HP x 2	3HP x 2	3 HP x 2	3 HP x 2
(PREWIRE)	110/230V	110/230V	110/230V	110/230V
Drill Speed (RPM)	3400	3400	3400	3400
Drill Chuck	1/2"	1/2"	1/2"	1/2'
Spindle Stroke (Max.)	4"	4"	4"	4"
Table Size(W x L)	18" x 50"	18" x 72"	10" x 72"	18" x 49"
Max. Working Length	50"	72"	72"	48"
Multiple Drill Head Available	Yes	Yes	Yes	No
Air Clamp	2.5	5.5	3 + 3	6
Standard Drill Spindle	4	8	4 + 4	12
Max. Drill Spindle	8	16	6 + 6	18
Max. Drill Distance (Chuck Type)	2"	2"	2"	2"
N.W.	2710 LBS	3180 LBS	4200 LBS	3960 LBS
G.W.	2980 LBS	3420 LBS	4800 LBS	4380 LBS

(Training and installation, tooling & rigging are optional)
(Customer is responsible for local regulations and connecting utilities)

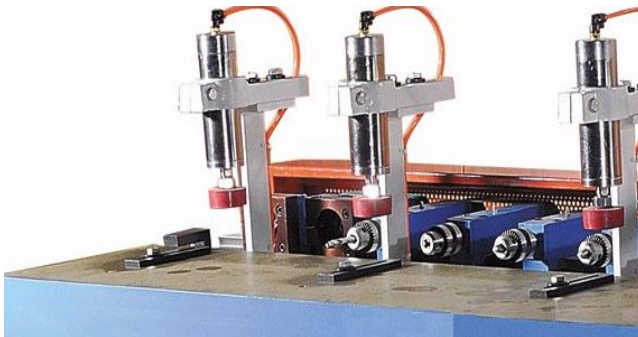

Optional Accessories: Multiple Drills Head.