



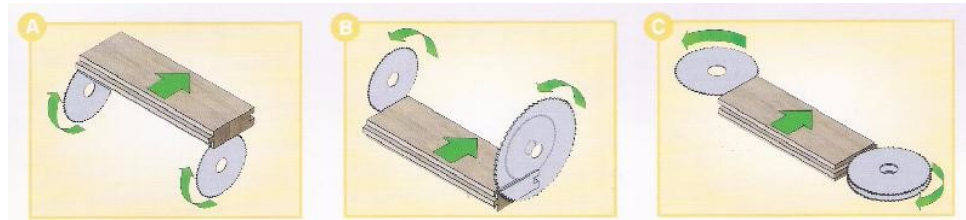

Authorized Dealer:
Global Sales Group, LLC
P.O. Box 1835 * Chico, CA 95927
Toll Free: 877-474-5521
Office: 530-893-2444
www.globalsalesgroupllc.com

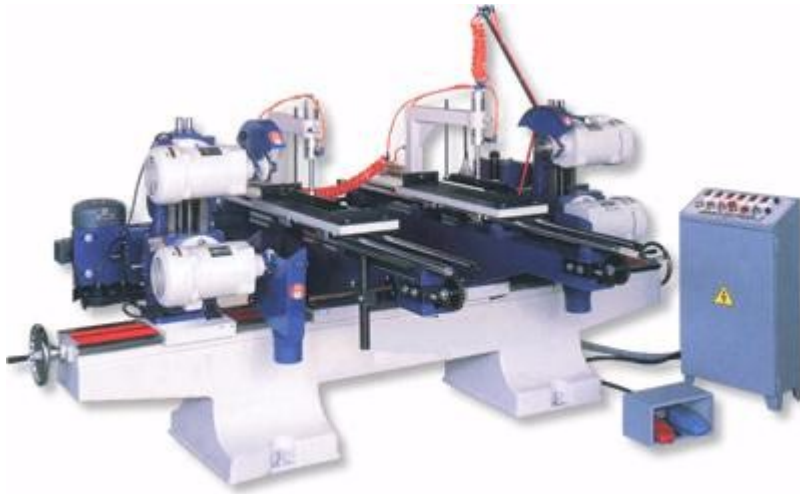

SET-5SA 4 Head Double End Tenoner Machine
SET-52SAT 6 Head Carriage Feed Double End

Optional: Auto Out feed Device; Return Conveyor

Features:

- With the double end miter saw, you can do cut-off stock faster or consider a double end miter saw combined with moulding head. It lets you cut off stock and moulding pattern in a single feed, that saves time, space, and cost.
- Air-operated clamp comes down holding sticks firmly in place. After work piece is clamped, table start to feed, performs trimming, shaping operations.
- With trim saw, you can cut stock clearly, no burrs for a trimming purpose.
- Moulding spindle is mounted at the rear of saw head enables the machine to perform edge moulding after stock is cut off.
- The entire cutting cycle, cut-off, shaping tenon or mortise is automatically operated at single pass of stock feeding.
- The table travels on a precision linear motion guide for stability.
- The table traverse is driven by power system, ensuring very stable, smooth workpiece feeding.
- Variable feed speed permits proper feed selection for hard or soft wood materials.
- Big hand wheel adjusts depth of cut.
- All controls are grouped in a control panel.
- Industrial full power motor for maximum cutting capacity.

- Precision sealed long-life bearing.
- Heavy cast iron frame and table for durability usage.
- Other size is optional.

SPECIFICATIONS		SET-5SA	SET-52SAT
CAPACITY	Max. Length or Cut	60"	60"
	Min. Length of Cut	12"	12"
	Max. Width of Cut	24"	24"
	Max. Clamping Thickness	4-1/2"	4-1/2"
SAW (TRIM)	Saw Blade Dia.	8" ~ 12"x 2	8" ~ 12"x 4
	Saw Arbor Dia.	1"	1"
	Saw Blade Speed	3400 RPM	3400 RPM
	Saw Head Swivel (Degree)	360	360
MOULDER (COPE) (SHAPER)	Moulder Spindle	1 " Dia. x 5" L x 2	1" Dia. x 5" L x 2
	Spindle Speed	6000 RPM	6000 RPM
	Spindle Swivel	360	360
TRAVERSE	Saw Longitudinal Travel	12"	12"
	Saw Vertical Travel	17"	17"
	Carriage Cross Travel	24"	24"
MOTOR	Saw Head Drive	2 HP x 2	2 HP x 4
	Moulder Spindle	2 HP x 2	2 HP x 2



SET-52SAT Shaper Head

Optional: Auto Outfeed Device

One Side with Air Piston to push the material, the other side with power pressure roller to catch it and bring all the material out at left hand side on the back of the machine